

Nut Plate System



Permanent, Reversible, Reusable
The NEW fastener.



- ⬡ Easy Application
- ⬡ Minimal Maintenance
- ⬡ Reduced Foreign Object Debris
- ⬡ Fixed retaining ring

Enduralock

14847 W 95th Street, Lenexa, Kansas www.enduralock.com 913.214.9911

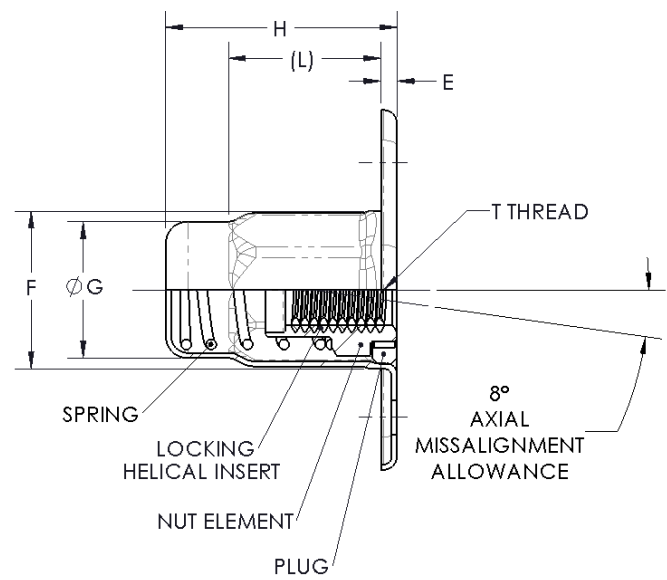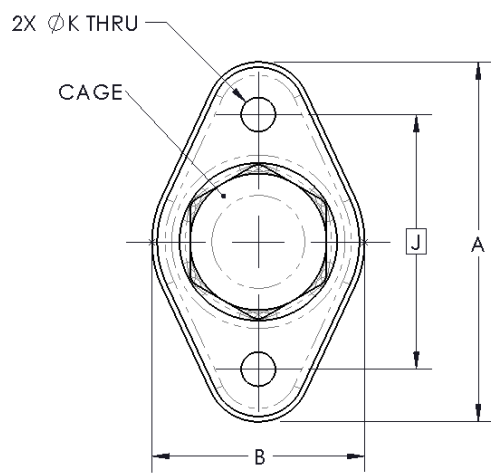

DIA	UNJF-3B THREAD	A MAX	B MAX	E MAX	F MAX	ØG	H MAX	J	ØK	(L)	APPROX. WEIGHT PER ASSY, LBS	TENSILE TRENGTH LBS
3	.1900-32	1.340	.790	.105	.545	.46	.710	.890	.135 .130	.486	.019	2,460
4	.2500-28	1.420	.860		.675	.52	.930	.970		.642	.031	4,580
5	.3125-24	1.560	1.010		.810	.65	1.150	1.110		.798	.052	7,390
6	.3750-24	1.800	1.220	.170	.970	.73	1.380	1.270		.951	.089	11,450
7	.4375-20	1.990	1.360		1.135	.86	1.610	1.430		1.107	.126	15,450
8	.5000-20	2.200	1.510		1.300	.98	1.840	1.600		1.264	.188	21,110

DIA	THREAD	A MAX	B MAX	E MAX	F MAX	ØG	H MAX	J	ØK	(L)	(M)	APPROX. WEIGHT PER ASSY, KG
M3	M3X0,5	32,26	18,29	2,67	12,07	10,16	15,24	20,83	3,43 3,30	10,36	0,51	0,006
M4	M4X0,7	32,26	18,29		12,07	10,16	15,24	20,83		10,36		0,006
M5	M5X0,8	34,04	20,07		13,84	11,7	18,03	22,61		12,34		0,008
M6	M6X1	36,07	21,84		17,15	13,2	23,62	24,64		16,31		0,014
M8	M8x1	39,62	25,65		20,57	16,5	29,21	28,19		20,27		0,023
M10	M10X1,25	45,72	30,99	4,32	24,64	18,5	35,05	32,26		24,16	0,81	0,039
M12	M12X1,25	55,88	38,35		33,02	24,9	46,74	40,64		32,11		0,085

MATERIAL:

NUT ELEMENT:

A286 CRES PER AMS5731, AMS5732, OR AMS5737.

LOCKING HELICAL INSERT:

304 CRES PER AS7245 OR EQUIVALENT

CAGE AND PLUG:

CRES 300 SERIES PER AMS5513 OR EQUIVALENT.

SPRING:

CRES 300 SERIES PER AMS-QQ-S-763 17-7PH PER QQ-S-763 OR
MUSIC WIRE PER MIL-W-6714 OR EQUIVALENT.

FOR MORE DETAILS CONTACT OUR ENGINEERING DEPT. AT 1-(913) 214-9911