


Silver Lock Fasteners


Permanent, Reversible, Reusable
The NEW fastener.

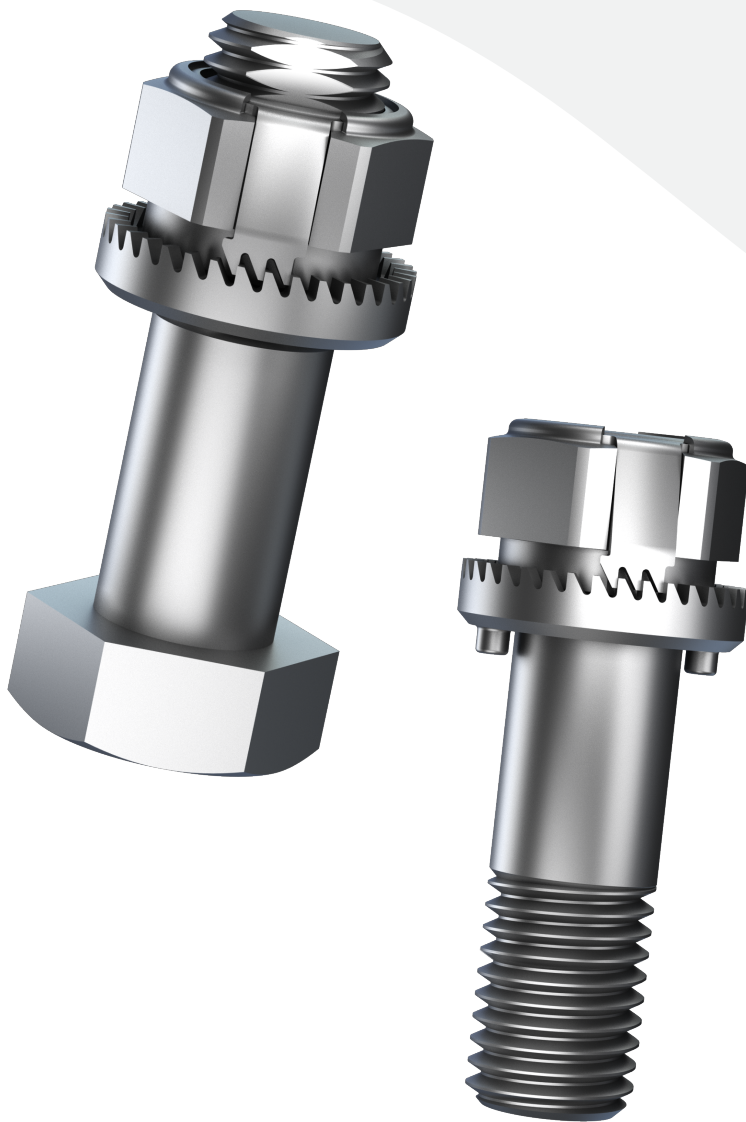


- ⬡ Highly Vibration Resistant
- ⬡ Standard Hex Socket Compatible
- ⬡ Accurate Preload

Enduralock

14847 W 95th Street, Lenexa, Kansas www.enduralock.com 913.214.9911

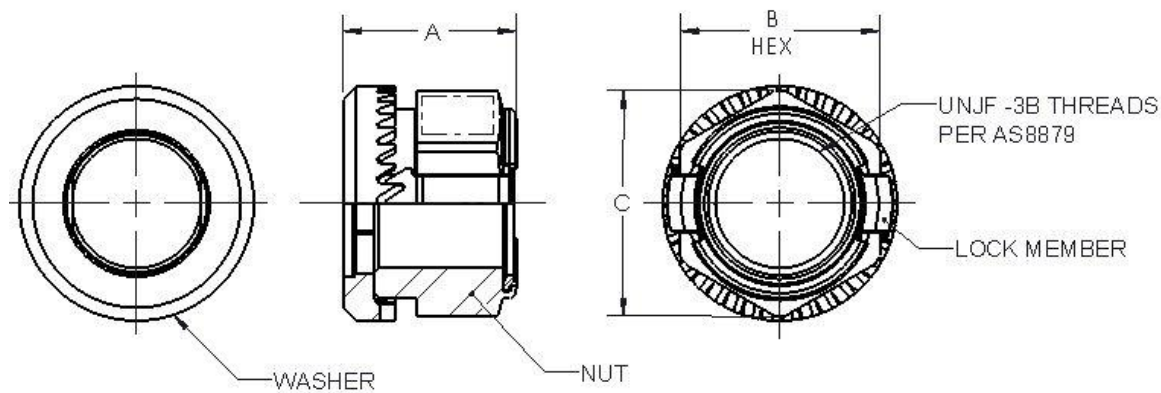

DIA	THREAD UNJF-3B	A MAX	B HEX		C MIN	TENSILE STRENGTH, LBS MIN		
			MAX	MIN		A286	ALLOY STEEL	INCO 718
3	.1900-32	.329	.376	.367	.410	2,825	3,620	4,070
4	.2500-28	.383	.439	.430	.482	5,060	6,470	7,270
5	.3125-24	.439	.502	.492	.552	8,000	10,200	11,500
6	.3750-24	.492	.564	.553	.622	11,900	15,200	17,100
7	.4375-20	.602	.690	.679	.766	16,100	20,600	23,200
8	.5000-20	.655	.752	.741	.837	21,450	27,500	30,900
9	.5625-18	.764	.877	.865	.978	27,250	34,800	39,200
10	.6250-18	.816	.940	.928	1.051	34,050	43,600	49,100
12	.7500-16	.926	1.064	1.052	1.191	49,300	63,200	71,000
14	.8750-14	1.099	1.252	1.239	1.403	67,400	86,300	97,000
16	1.0000-12	1.253	1.440	1.427	1.615	89,300	112,000	129,000

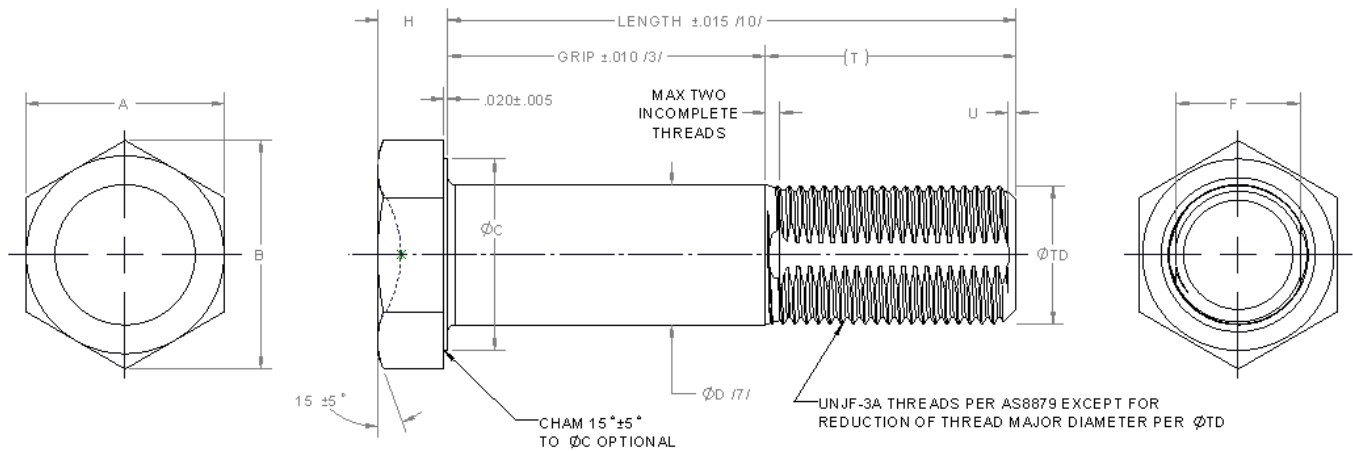

DIA	THREAD UNJF-3A	A HEX		B MIN	ØC MIN	ØD				F	H	(T)	U	ØTD	CRES A286		ALLOY STEEL		NICKEL ALLOY 718	
										MIN	0.015	/6/	MAX		TENSILE STRENGTH	DOUBLE SHEAR	TENSILE STRENGTH	DOUBLE SHEAR	TENSILE STRENGTH	DOUBLE SHEAR
						UNPLATED		PLATED OR COATED					MIN		LBF	LBF	LBF	LBF	LBF	LBF
		MAX	MIN			MAX	MIN	MAX	MIN						MIN	MIN	MIN	MIN	MIN	MIN
3	.1900-32	.376	.367	.410	.335	.1895	.1890	.1895	.1885	.138	.11	.345	.039	.181	3,620	5,380	3,620	5,380	4,970	7,100
4	.2500-28	.439	.429	.480	.398	.2495	.2490	.2495	.2485	.195	.125	.425	.045	.241	6,470	9,300	6,470	9,300	8,870	12,300
5	.3125-24	.502	.492	.552	.460	.312	.3115	.312	.311	.25	.156	.469	.052	.302	10,200	14,600	10,200	14,600	14,100	19,200
6	.3750-24	.564	.554	.623	.523	.3745	.3745	.3745	.3735	.311	.188	.578	.052	.364	15,200	21,000	15,200	21,000	20,900	27,800
7	.4375-20	.690	.678	.764	.648	.437	.4365	.437	.436	.363	.219	.694	.062	.426	20,600	28,600	20,600	28,600	28,300	37,600
8	.5000-20	.752	.741	.836	.710	.4995	.4990	.4995	.4985	.426	.25	.735	.062	.488	27,500	37,300	27,500	37,300	37,800	49,200
9	.5625-18	.877	.865	.978	.835	.5615	.5610	.5615	.5605	.481	.281	.84	.068	.550	34,800	47,200	34,800	47,200	47,900	62,200
10	.6250-18	.940	.928	1.052	.898	.624	.6235	.624	.623	.544	.312	.902	.068	.612	43,600	58,300	43,600	58,300	59,900	76,700
12	.7500-16	1.065	1.052	1.191	1.023	.749	.7485	.749	.748	.661	.375	1.041	.078	.737	63,200	83,900	63,200	83,900	86,900	110,000
14	.8750-14	1.252	1.239	1.405	1.210	.874	.8735	.874	.873	.775	.438	1.184	.089	.861	86,300	114,000	86,300	114,000	119,000	150,000
16	1.0000-12	1.440	1.427	1.619	1.398	.999	.9985	.999	.998	.885	.500	1.309	.104	.986	112,000	149,000	112,000	149,000	155,000	196,000

PRODUCT ALSO AVAILABLE IN COURSE THREAD
FOR MORE DETAILS CONTACT OUR ENGINEERING DEPT. AT 1-(913) 214-9911